

Conversion

SolvisBen with HP

For connecting the SolvisMia or SolvisLea heating pumps

SolvisBen conversion

- Solo with SolvisLea 7, 11 and 14
- Solo with SolvisLea 8.3 P
 - Gas to Gas Hybrid
 - Oil to Oil Hybrid



1 Information About These Instructions

These instructions are intended for you as a technician from an installation company. You will find the specifications for installation, start-up and maintenance of the system here.

Please keep these instructions with the system so they can be referred to when necessary.

We recommend that you participate in a Solvis training course to ensure safe and proper installation.

As we are interested in improving our technical documentation, we appreciate feedback of any kind.

Copyright

All parts of this document are protected by copyright. Any unauthorised use outside of the narrow limits of the copyright law is not permitted and is punishable by law. This especially applies to copying, translating, microfilming and storing and editing in electronic formats. © SOLVIS GmbH, Braunschweig.

A list of our international representatives is provided at www.solvis.com.

Please understand that the telephone numbers are reserved for use by our installers.

Interested system operators should contact their installer.

Symbols used



DANGER

Immediate danger, with serious health consequences and even death.



WARNING

Danger, with potentially serious health consequences.



CAUTION

Possible risk of moderate or light injury.



CAUTION

Risk of damage to unit or system.



Useful information, notes and work tips.



Change of document, referring to another document.



Energy-saving tip with suggestions on how to save energy. This reduces costs and helps protect the environment.

Contents

1	Information About These Instructions.....	2
2	Safety Notes.....	5
3	System Versions.....	6
4	Scope of Delivery	7
5	Installation	8
5.1	Heating pump installation.....	8
5.2	Draining the SolvisBen	8
5.3	Installing the buffer charging station.....	8
5.4	Switching valve installation.....	8
5.5	Heating flow preparation.....	9
5.5.1	SolvisBen without internal HCS.....	9
5.5.2	SolvisBen with internal HCS	10
5.6	HP flow preparation.....	11
5.7	Heating pump connection.....	12
5.7.1	Heating pump return connection.....	12
5.7.2	Heating pump flow connection.....	12
5.8	Electrical connection.....	13
5.8.1	General information.....	13
5.8.2	Connecting the buffer charging station	13
5.8.3	Connecting switching valve group.....	13
5.8.4	Sensor connection.....	14
5.8.5	Connecting SmartGrid (optional)	14
5.8.6	Heating pump voltage supply.....	14
5.8.7	Completing the connection tasks.....	14
6	Start-Up	15
6.1	Filling the system	15
6.2	Flushing the load circuit and heating pump.....	15
6.3	Configuration SolvisControl	15
6.4	Further commissioning	15
6.5	Final Tasks.....	15
7	Appendix.....	16
7.1	System diagram.....	16
7.1.1	SolvisBen HKS Gas/Oil Hybrid with heating pump	16
7.1.2	SolvisBen Gas/Oil Hybrid with heating pump and three heating circuits	18
7.2	Mains circuit board SolvisBen WP	20
7.2.1	Connection table (system status).....	20
7.2.2	Connection Diagram.....	21
7.3	Mains circuit board SolvisBen Hybrid	22
7.3.1	Connection table (system status).....	22
7.3.2	Connection Diagram.....	23
7.4	Expansion Board	24
7.4.1	View.....	24

7.4.2	Connection table	24
7.5	SmartGrid connection board	25
7.5.1	Connection table	25
7.5.2	Connection Diagram.....	25
7.6	Explanation of Symbols.....	26
7.6.1	Hydraulic elements	26
7.6.2	Electrical symbols	27

2 Safety Notes

**Observe the safety notes**

This is for your own safety.

- Make sure that you are familiar with the safety notes before beginning work.
- Observe and adhere to the relevant safety regulations and the valid accident prevention regulations.
- You should also follow the safety notes from the available system documentation.

**Work to be performed by qualified technicians**

- Only trained specialist companies may install or maintain the system.
- Only qualified electricians may work on electrical equipment.

**CAUTION****Observe instructions**

Solvis is not liable for any damage resulting from non-observance of these instructions.

- Read the instructions carefully before operating or installing the system.
- Contact our Technical Sales department if you have any questions.

**CAUTION****Do not make any unauthorised modifications**

Otherwise, there is no guarantee that the system will function correctly.

- You must not make any changes to the components of the unit.
- Only use original spare parts.

3 System Versions

The conversion kit differs depending on whether the heating circuit station is integrated into the storage tank or fitted externally. It is used to retrofit a SolvisBen Gas or SolvisBen Oil with a Solvis heating pump.

Likewise, the conversion kit can be used to retrofit a SolvisBen Solo with the heating pumps SolvisLea 8.3 Premium or SolvisLea 7, 11 and 14, because it is only suitable for the combination of a SolvisBen Solo with heating pumps including an electric heating cartridge.

The buffer charging station with a speed-controlled pump is used to adjust the output, the sludge separator to protect the heating pump and the switching valve group is used to feed the charging current into the SolvisBen's stratified storage tank, depending on the operating status.

4 Scope of Delivery

Not shown:

- Sludge separator (SAS)
- SmartGrid Box
- Hydraulic connection material
- Sensors and electron. accessories (including Modbus and connection cables, socket boards)

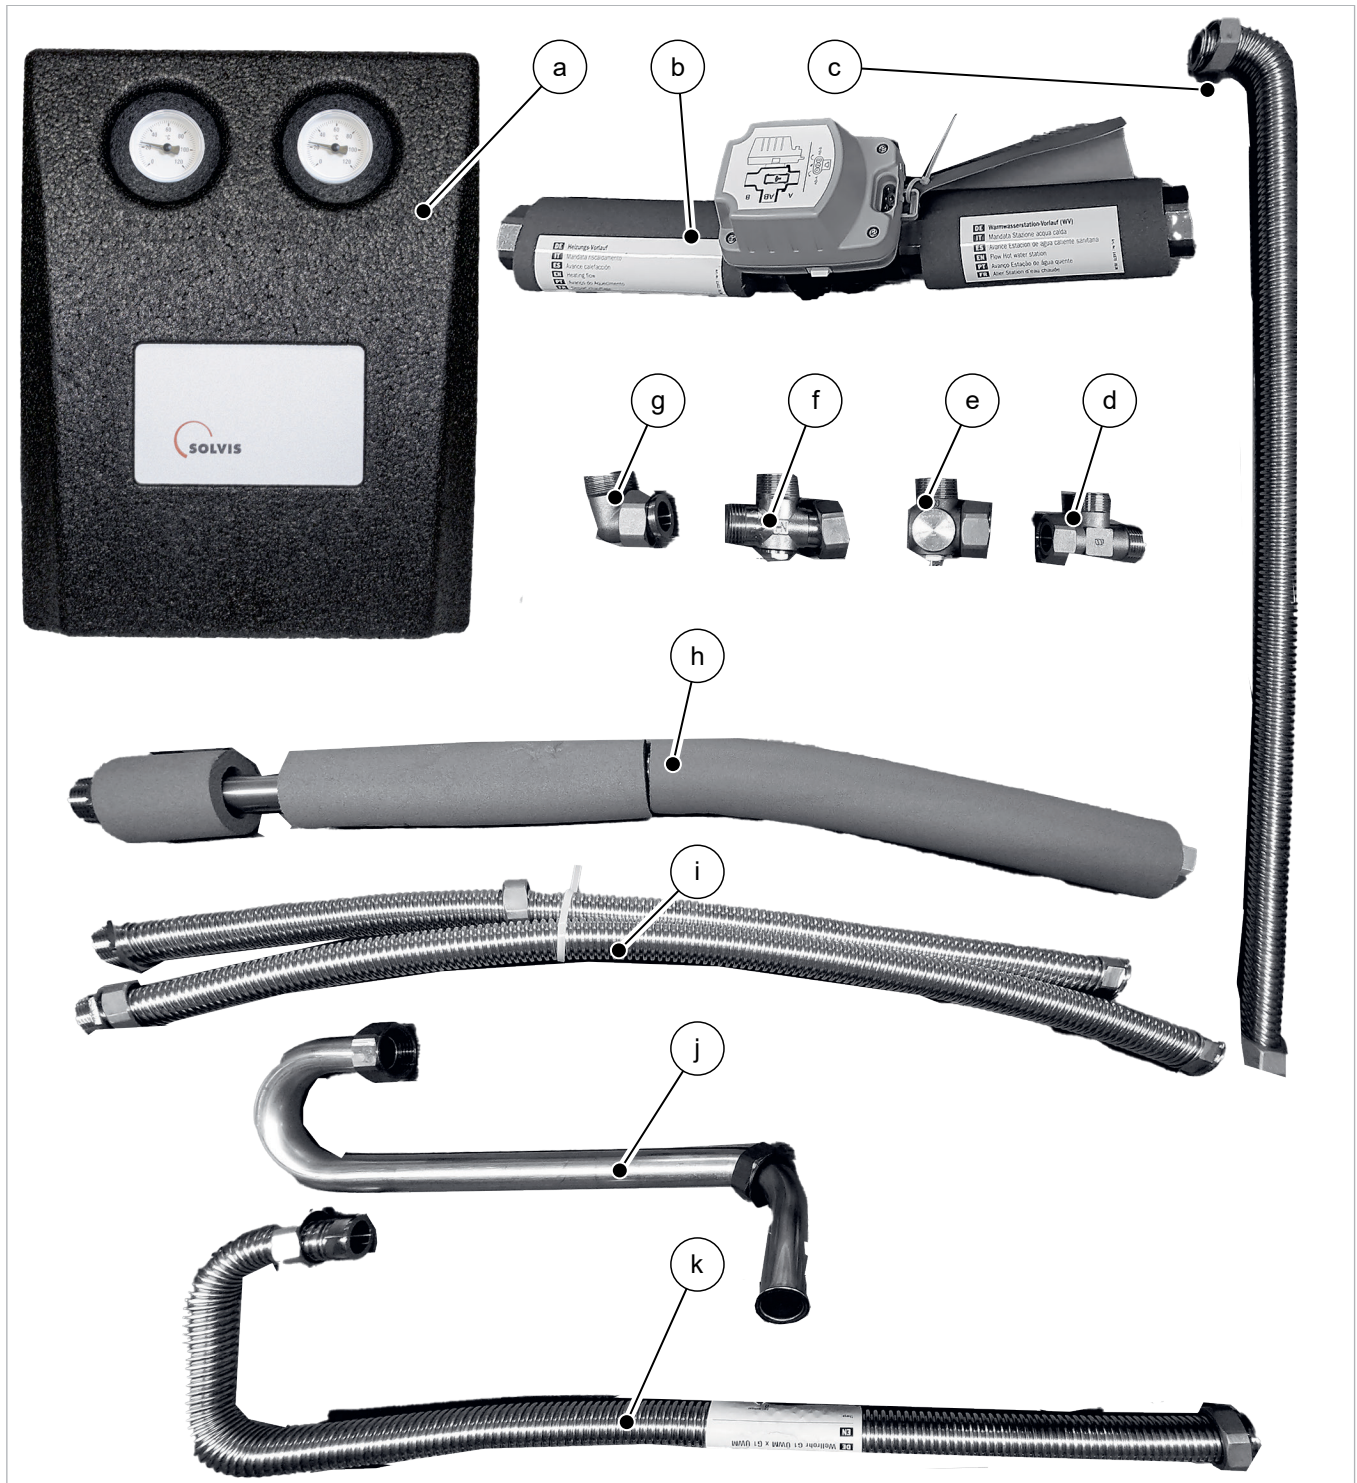


Fig. 1: Kits for converting SolvisBen and SolvisBen HKS to SolvisLea

- a Buffer charging station PLAS-WP-HB-WM
- b 3-way switching valve group
- c Corrugated pipe, solar compensating line
- d T-piece G 3/4
- e Sensor elbow G1

Only in the conversion kit for the SolvisBen with a heating circuit station:

- f T-piece 30528
- g Bracket G1 ÜW x G1 AG
- h Corrugated pipe WP-VL-SBHB
- i Corrugated pipe set G1

- j Bottom connection pipe, heating flow, SL/WP
- k Corrugated pipe G1 UN x UN

5 Installation

5.1 Heating pump installation

Setting up the heating pump

1. Install the heating pump according to the supplied installation instructions and route the connection pipes to the SolvisMax.

5.2 Draining the SolvisBen



CAUTION

Allow the storage tank to cool down

Otherwise, there is no guarantee that the connection is sealed.

- Before commencing the work, allow the storage tank to cool down to room temperature.

Shutting down the system

1. Shut off the fuel supply if necessary.
2. Shut down the system and disconnect it from the power supply.
3. Open protective cover and disconnect burner plug.
4. Allow the system (burner) to cool down.

Draining the storage tank

Collect the heating system water in suitable containers so that it can be reused.

1. Remove the front casing.
2. Drain the storage tank.

Drainage quantities (flange is free)

Storage tank size	Minimum drainage volume [l]
SolvisBen	200

5.3 Installing the buffer charging station

Installing the buffer charging station

Install the buffer charging station in accordance with the installation instructions.



→ see MAL-PLAS-WP-WM

5.4 Switching valve installation

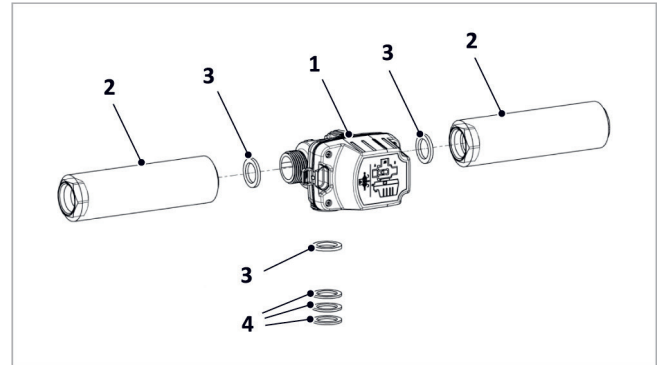


Fig. 2: Switching valve group with seals (pre-assembled)

- 1 Switching valve group
- 2 Connector
- 3 Rubber seal
- 4 Flange gasket

Connecting the switching valve group to the buffer charging station

Integrate the switching valve group into the heating pump flow according to the system diagrams (see page 16 onwards).

5.5 Heating flow preparation

5.5.1 SolvisBen without internal HCS

Preparing the connection

1. In the heating flow (1), insert a customer-supplied T-piece between the storage tank and the heating distributor bar/heating circuit station.
2. Replace the elbow on the heating return connection in the SolvisBen with the 1" sensor elbow (e).

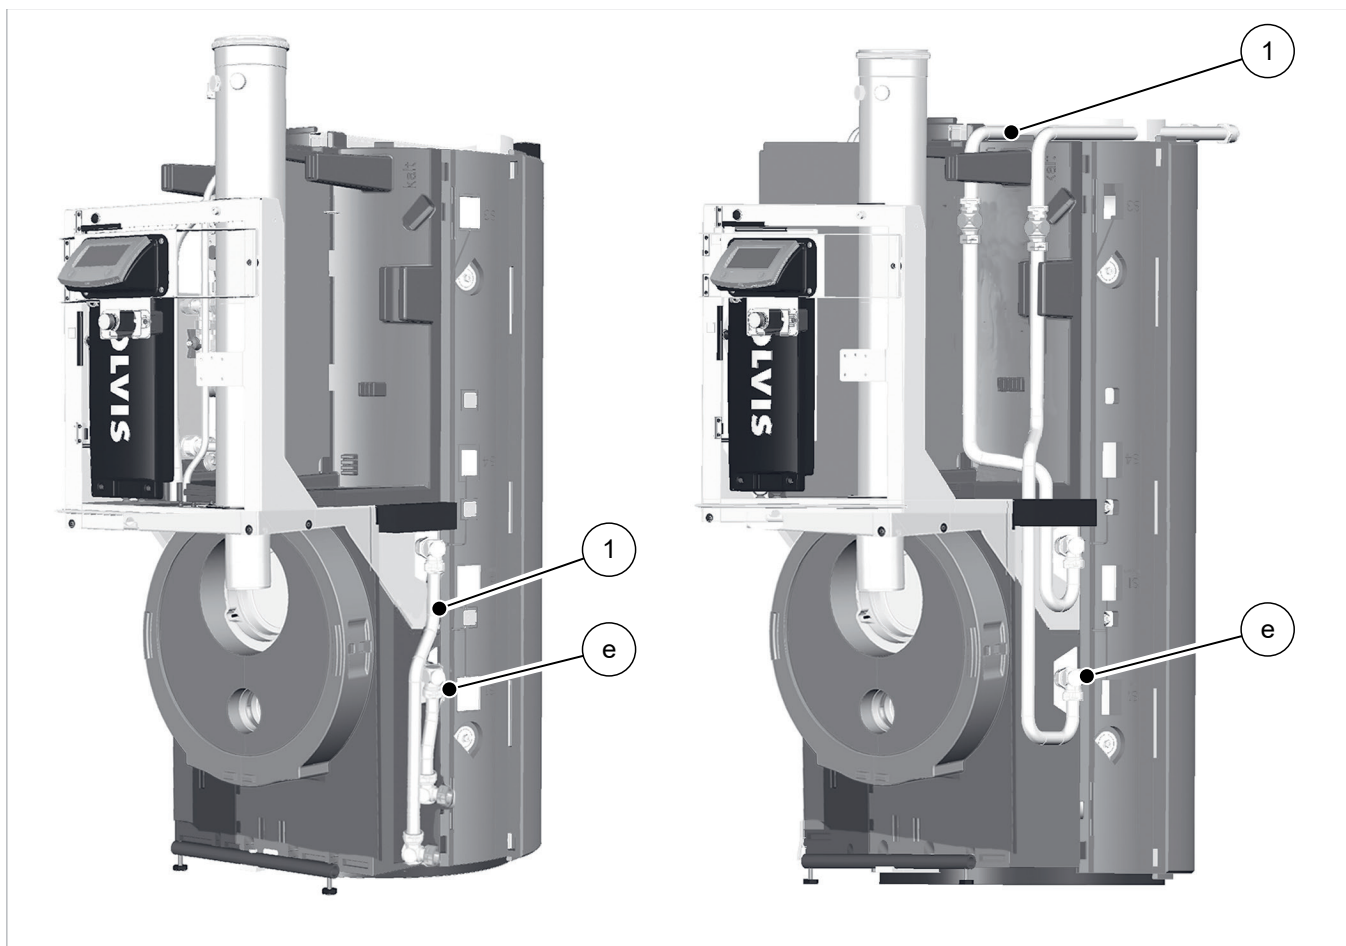


Fig. 3: Ext. connections for HCS routed down (left side) and routed back (right side)

1 Heating flow
e 1" sensor elbow

5.5.2 SolvisBen with internal HCS

Performing the conversion

1. Remove the three pipe sections (2) below the shut-off valves in the heating flow and return.

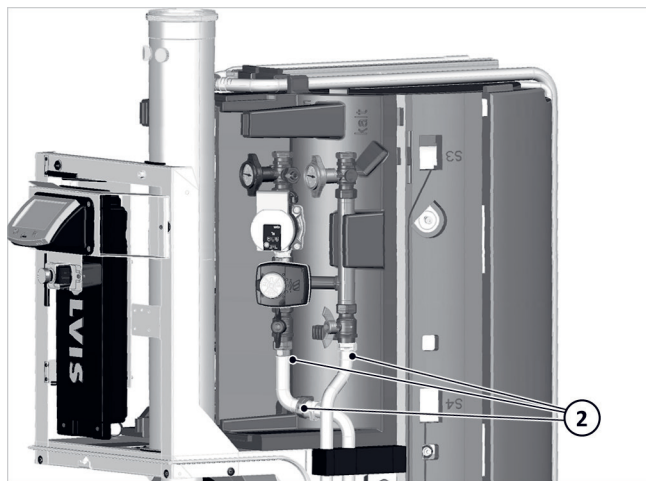


Fig. 4: Removing the pipe sections (2)

2. Replace the elbow on the return storage tank connection with the 1" sensor elbow (e).
3. Install 1" T-piece (f) directly on the heating flow ball valve. Do not tighten it yet.
4. Attach the bottom heating flow connection pipe (j) to the side outlet of the 1" T-piece (f) and connect it to the heating flow connection on the Ben.
5. Fasten the 1" T-piece (f) on the ball valve.
6. Screw the 1" elbow (g) to the 1" T-piece (f) and corrugated pipe WP-VL-SBHB (h) (HP flow).
7. Attach corrugated pipe WP-VL-SBHB to the flue duct* with clamps (1). (* = for Ben manufactured from

September 2020, alternatively connect with pipe clamp on flue duct).

8. Connect 1" corrugated pipe (k) to 1" sensor elbow (e) and connect the heating circuit station return connection. Bend the pipe so that it does not collide with the side casing.

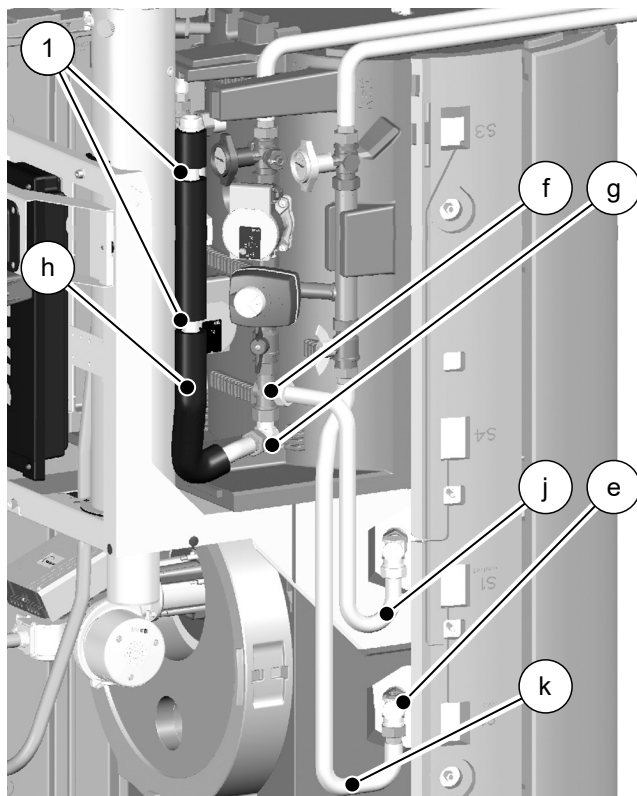


Fig. 5: Converted HCS connection

- 1 Clamp (SE-M8-27) + threaded pin (GWS-M8-35)
- e 1" sensor elbow
- f 1" T-piece (heating flow)
- g 1" elbow
- h Corrugated pipe WP-VL-SBHB
- j Bottom connection pipe, heating return
- k 1" corrugated pipe

5.6 HP flow preparation

Only SolvisBen with installed solar system

On the SolvisBen, the buffer tank is charged via the solar stratified charger. If a thermal solar system is already connected, the $\frac{3}{4}$ " T-piece must be used to create a bypass in the solar flow between the solar heat transfer station and the storage tank; see → fig. 6.

i This sketch serves as guidance only and does not claim to be complete. It does not replace detailed and specific planning.

- To ensure the installation type is performed correctly, follow all the applicable standards, guidelines and technical rules at all times.

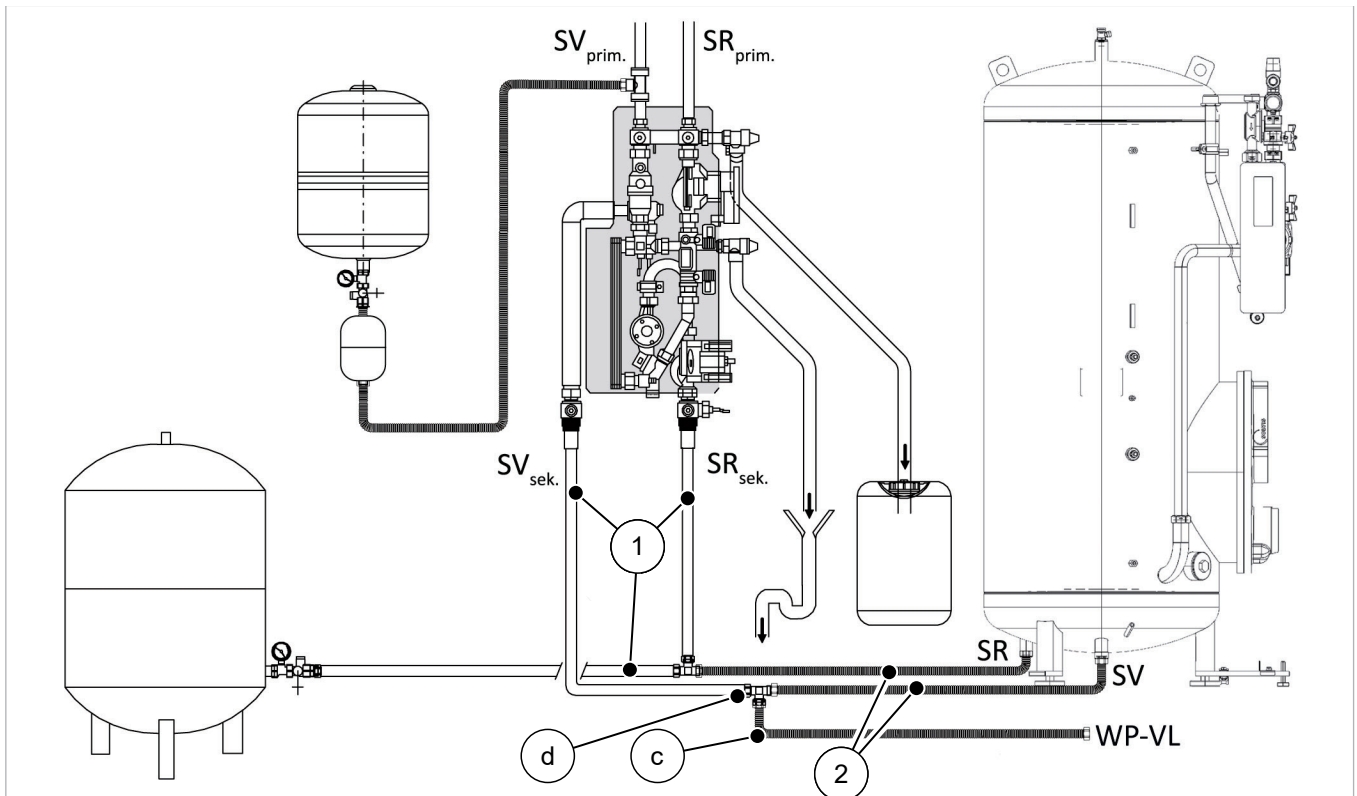


Fig. 6: Position of the 3-way switching valve (connections on the right)

- 1 Pipelines, customer-supplied
- 2 Corrugated pipe for solar compensation line (included in the scope of delivery of the SUES-5.5)
- c Corrug. pipe solar comp. pump
- d T-piece, $\frac{3}{4}$ "
- SV Solar flow
- SR Solar return flow
- SV_{prim.} Solar flow (collector side)
- SR_{prim.} Solar return (collector side)
- SV_{sek.} Solar flow (storage tank side)
- SR_{sek.} Solar return (storage tank side)
- WP-VL Heating pump flow

5.7 Heating pump connection

5.7.1 Heating pump return connection

Installing the sludge separator

1. Fit the supplied sludge separator (SAS) in the return line between the heating pump (WP) and SolvisBen (see also ALS-BEN).

Connecting the heating pump return

1. Connect the return line for the heating pump to the shared return line of the heating circuits (see ALS-BEN).

5.7.2 Heating pump flow connection



CAUTION

Danger due to overpressure

Potential damage to the heating system

- The heating pump must be secured using a heating safety valve with a reaction pressure of max. 3 bar.

Connecting the switching valve to the SolvisBen

1. Connect the connection WW-VL to the three-way switching valve (b) on site to the solar stratified charger (4) on the Ben.

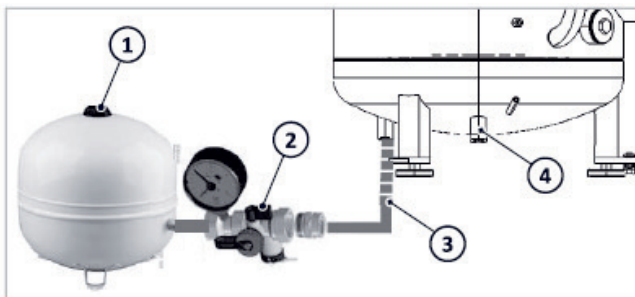


Fig. 7: Connecting the HW flow to the storage tank (without solar system)

- 1 Membrane expansion vessel (MEV)
 - 2 MEV connection group
 - 3 Corrugated pipe
 - 4 Solar flow (solar stratified charger)
2. When using solar systems connected to the stratified solar storage tank, see → chapter "HP flow preparation" on page 11.
 3. **SolvisBen HKS only:** Connect the connection HVL to the three-way switching valve (b) on site to the connection pipe (h). To do so, cut the EPP cover (1) at the embossed sections.

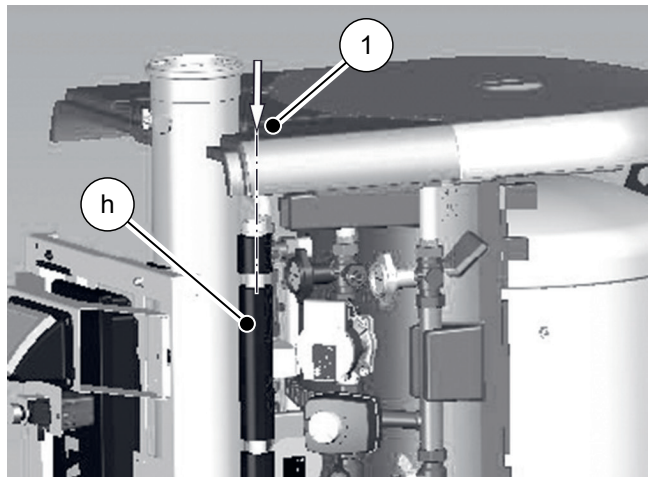


Fig. 8: Cutting the EPP cover

4. When using the SolvisBen without an internal HCS, see → chapter "SolvisBen without internal HCS" on page 9.
5. Insert the cable supplied for the switching valve into the switching valve and route it to the mains circuit board housing.

Connecting the heating pump flow to the buffer charging station

1. Route the flow line coming from the heating pump to the buffer charging station and connect it.
2. Guide the power cable and the control lines for the buffer charging station pump and the switching valve into the front frame through a pipe lead-through (with a 3x reducer insert).
3. Route the cables into the housing for the mains circuit board.

5.8 Electrical connection

5.8.1 General information



DANGER

Risk of electrical shock

Damage to health, cardiac arrest possible.

- Disconnect the system from the mains before carrying out work on it and ensure that it cannot be turned on again



CAUTION

Country-specific regulations

Regulations can differ depending on the country and the region.

- These are to be observed and adhered to in order to ensure safe and faultless operation.
- If certain laws and regulations do not apply in a particular country, they are to be replaced by the country's own specific laws and regulations.



WARNING

In the event of incorrect mains connection

Contact voltages can be extremely hazardous.

- All mains connection work must be performed by authorised technicians.
- Work must be done in compliance with relevant regulations, especially DIN VDE 0100/IEC 60364 (Erection of power installations), accident prevention regulations and the guidelines of the responsible power supply company.
- Before connection, the current type and the mains voltage must be compared with the specifications on the unit nameplate.
- The minimum cross section of all connection lines must be designed in accordance with the power consumption of the unit.
- Only operate the unit while observing the prescribed safety measures and information in these instructions.
- Incorporate the unit into the local equipotential bonding while observing the minimum cross section.
- Ensure that the phase is correct during multi-phase mains connection.



CAUTION

Prevent the system from being influenced by electromagnetic fields.

Risk of heating system malfunction or failure.

- Prevent electrostatic discharges.
- Keep strong electrical fields such as those created by mobile phones away from the heating system. These fields can cause sensitive electronic components to malfunction.



CAUTION

Criteria for line installation

Malfunction or failure of heating system possible.

- Check that all cable and plug connections are connected correctly.
- The bus and sensor lines must be routed separately from lines over 50 V to prevent the controller from being influenced by electromagnetic fields.
- Do not install control devices directly adjacent to control cabinets or electrical devices.
- The electrical lines must not come into contact with hot parts.
- If possible, run all lines in a cable channel and, if necessary, secure with strain relief devices.



CAUTION

Criteria for line length

Risk of heating system fault or failure.

- The total cable resistance for the sensor cables must not exceed 2.5 ohms. For cables with a cross section of 0.25 mm², this corresponds to a length of up to 5 m.
- For cross sections of 0.5 or 0.75 mm², the maximum cable length is 15 or 50 m.
- Sensor cables for temperature sensors should not be unnecessarily long. For very long cables, sensor correction can be performed to minimise the systematic variance errors.



CAUTION

Observe ambient conditions

Malfunction or failure of system possible.

- Avoid ambient temperatures outside of the permitted range of 5°C to +50°C.
- Avoid dew condensation and an annual mean relative humidity higher than 75% (briefly 95%).

5.8.2 Connecting the buffer charging station

The buffer charging station has three connection cables: power cable, signal cable and Modbus cable.

The power and signal cables are connected to the load pump. The SolvisControl system controller, the Alsonic volume flow sensor and the internal heating pump controller communicate via a Modbus connection. This connection is established through a Modbus connection box, which is integrated into the buffer charging station (PLAS-WP-WM).



For information about establishing an electrical connection and important notes about the Modbus assignment → see *MAL-PLAS-WP-WM*

5.8.3 Connecting switching valve group



Applies only to SolvisBen Oil: Remove the suppressor contacts of the burner at output A14 in the mains module. Burner suppression is only possible via the interface.

Connecting the switching valve

1. Run the connection cable for the three-way switching valve to the SolvisControl 3 mains circuit board.
2. Connect the power cable to output A14 and secure the cable using the strain relief device.

5.8.4 Sensor connection

Connecting the sensors

1. Attach sensor S9 to the sensor elbow on the Ben heating return using the supplied grub screw.

5.8.5 Connecting SmartGrid (optional)

i The following operating states can be implemented via the SmartGrid connection board according to the "SG-ready" label.

- Heating pump lock (e.g. idle period of utility supply company)
- Increased heating pump operation
- External requirement by the utility supply company or heating pump operation, e.g. via energy management system

If not in use, heating pump runs in normal mode.

Installing the SmartGrid Box

1. Install the supplied SmartGrid box (1) in the Ben. Use adhesive or drill 2 holes in the rear panel of the mains module.

i If the SolvisBen was produced after September 2020, two drill holes are already provided.

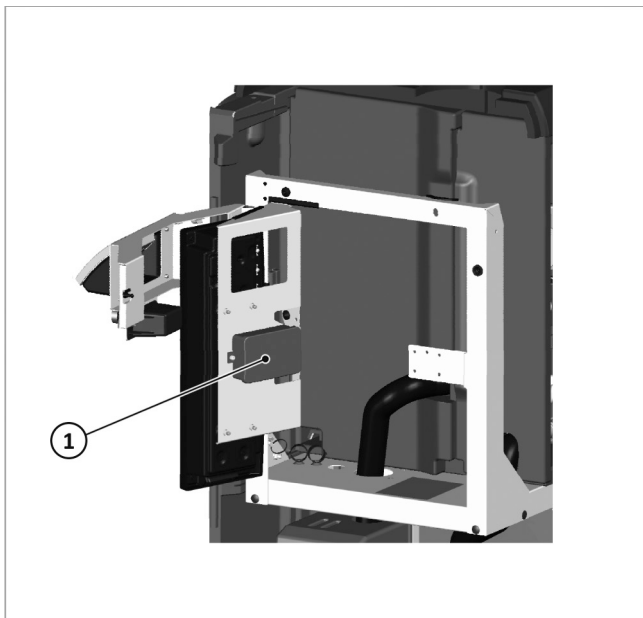


Fig. 9: Rear panel of the mains module

Establishing a power supply for the SmartGrid Box

1. Connect the supplied SmartGrid connection cable to the SmartGrid board.
2. Guide the cable into the mains module housing of the charging module.
3. Plug into the expansion board (see ALS-BEN).

Connecting the SmartGrid

1. Route the control line of the SmartGrid device to the SolvisBen connection board and connect it according to the connection diagram (see → fig. 19, page 25).

5.8.6 Heating pump voltage supply

Establishing the power supply

1. Connect the power supply for the Solvis heating pump as described in the chapter "Electrical connection" in the installation instructions for the applicable heating pump.



See also → *SolvisLea (MAL-LEA), SolvisLea 8.3 Premium (MAL-LEA-8P), SolvisLea Eco (MAL-LEA-E) or SolvisMia (MAL-MIA) installation instructions.*

5.8.7 Completing the connection tasks

Plausibility check

1. Switch to the "Installer" user mode.
2. Open the "Others" -> "System overview" sub-menu.
3. In the "System diagram (chart)" or "System status (table)" menu, check the sensor values for plausibility.
4. If necessary, change the sensor type under "Inputs".

Close the protective housing for the mains module

1. Check that all lines have been routed correctly and were not caught while the cover was being closed.
2. Carefully put on the strain relief devices.
3. Check that all the socket boards have been plugged into the mains module.
4. Fasten the cover (1) using 4 screws (2).

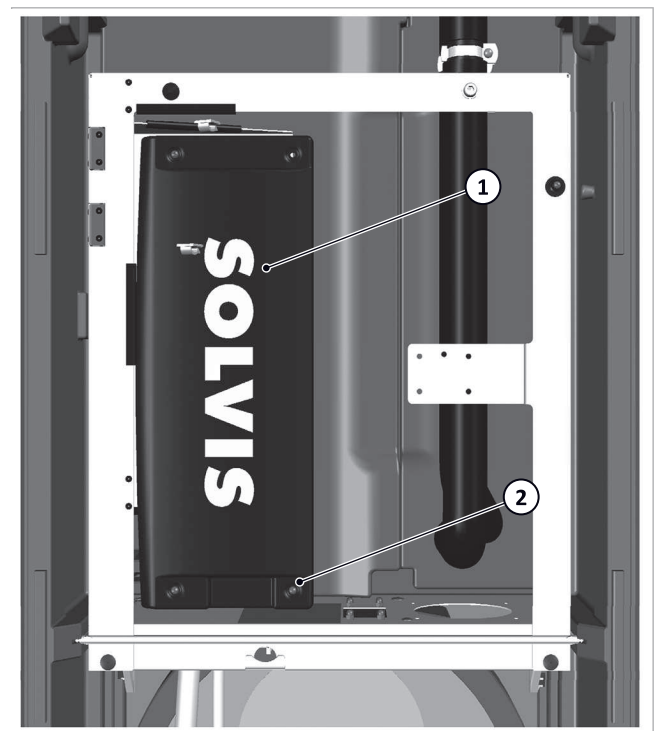


Fig. 10: Attach the cover of the mains circuit board

6 Start-Up

Start-up takes place in the prescribed order:

- i** The systems folder includes a start-up report that must be filled out completely when starting up the system and kept together with the system.

6.1 Filling the system



CAUTION

Observe the quality of the fill water

There may be damage due to limescale formation/corrosion in the heating system.

- The fill water for the heating system must meet the requirements of VDI 2035, parts 1 and 2



If water treatment is required for the raw water, we recommend the "Permasoft-ALU" system from Permatrade-Wassertechnik GmbH.



Use the system log included in the plant documentation; it serves as proof of proper heating water treatment.

Fill the system (pressure test)

1. Fill system using boiler filling and emptying valve (1).

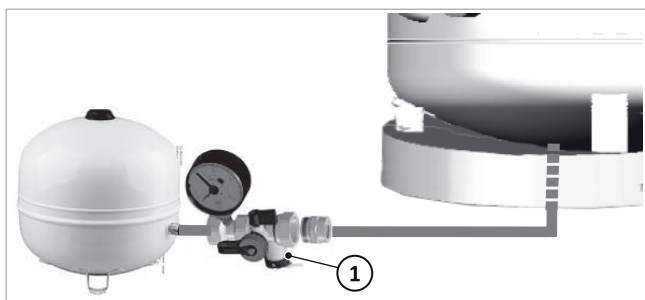


Fig. 11: Boiler filling and emptying valve on the MEV connection group

2. Bleed the system, including the storage tank.
3. Check that there are no leaks.



CAUTION

Pay attention to the pressure in heating system

The safety valve may blow out.

- The maximum permitted pressure is 3.0 bar.
- External devices such as heating pumps may be designed for lower maximum system pressures.



See installation instructions for → MAL-LEA, MAL-LEA-8P, MAL-LEA-E or MAL-MIA heating pumps

4. Set the filling pressure to 0.5 bar above the admission pressure, i.e. between 2.0 and 2.5 bar.

6.2 Flushing the load circuit and heating pump



Flush the SolvisMia and connection pipes to the SolvisBen; see → installation instructions (MAL-MIA).



Flush the SolvisLea and connecting pipes for the SolvisBen; see → assembly instructions (MAL-LEA, MAL-LEA-8P or MAL-LEA-E).

6.3 Configuration SolvisControl

Configuring the SolvisControl

SolvisControl must be configured before starting up the system.

After configuration, the startup process can be continued.

1. Configure the SolvisControl.



Carry out all the steps described, see → sec. "Configuration of the SolvisControl" in the operating instructions (BAL-SBSX-3-I).

2. Perform the SolvisControl basic settings.



Perform all of the described steps in accordance with → "Basic settings: Heating, water and circulation, if required" in the operating instructions (BAL-SBSX-3-I).



For a basic introduction to operat. the system controller, see → chapter "Operating the SolvisControl" in the operating instructions (BAL-SBSX-3-K).

6.4 Further commissioning



Continue following → the assembly instructions (MAL-PLAS-HP-WM).

6.5 Final Tasks

3. Instruct the system operator regarding expert operation.
4. Explain the settings for heating, hot water and circulation.

7 Appendix

7.1 System diagram

7.1.1 SolvisBen HKS Gas/Oil Hybrid with heating pump

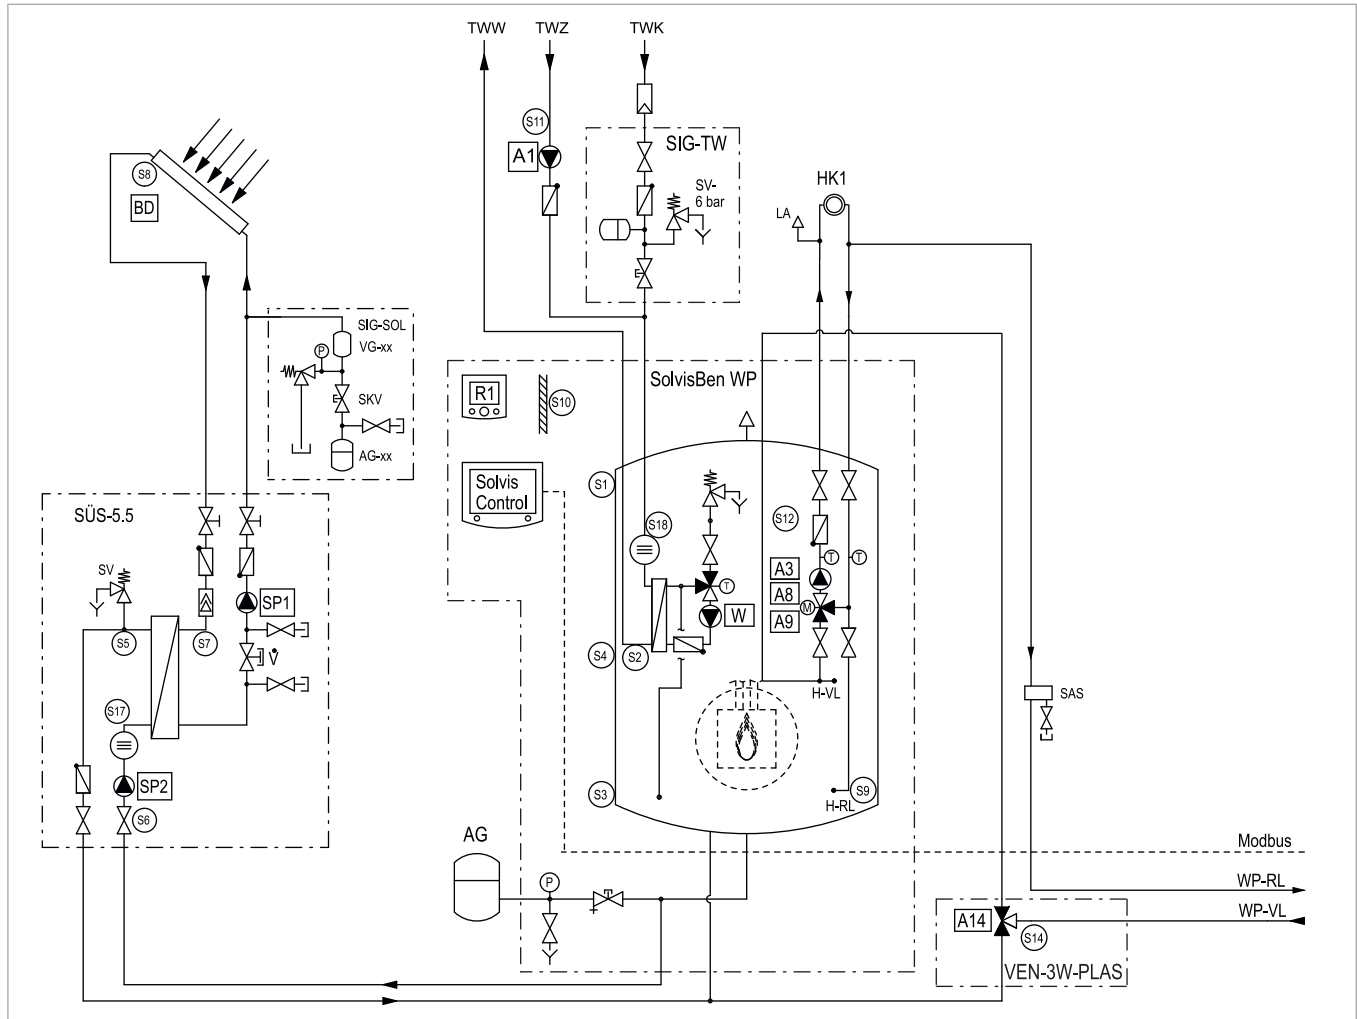


Fig. 12: SolvisBen Gas/Oil Hybrid with integrated heating circuit station, solar system and Solvis heating pump – part 1

Equipment

- Stratified solar storage tank
- SolvisControl 3 system controller
- Drinking water heating
- Solar circuit with one collector (field)
- One mixed heating circuit

Assemblies:

R1	Room operating unit, heating circuit 1
SIG-TW	Safety group, drinking water connection
PLAS-WP-WM	Wall-mounted WP buffer charging station
VEN-3W-PLAS	3-way switching valve for PLAS
BD	Lightning protection box
AG-xx	Membrane expansion vessel, solar circuit
VG-xx	Primary tank, solar circuit
SUES-5.5	Solar heat transfer station

Abbreviations

LA	Air separator
AG	Expansion vessel
SAS	Sludge separator
SV	Safety valve
TWK	Drinking water network, cold connection
TWW	Drinking water network, hot connection
TWZ	Drinking water network, circulation connection
H-RL	Heating return
H-VL	Heating flow
LP	Load pump
SIG-SOL	Solar circuit safety group
SKV	Cap valve, solar circuit
V	Adjusting valve
HK1	Heating circuit 1

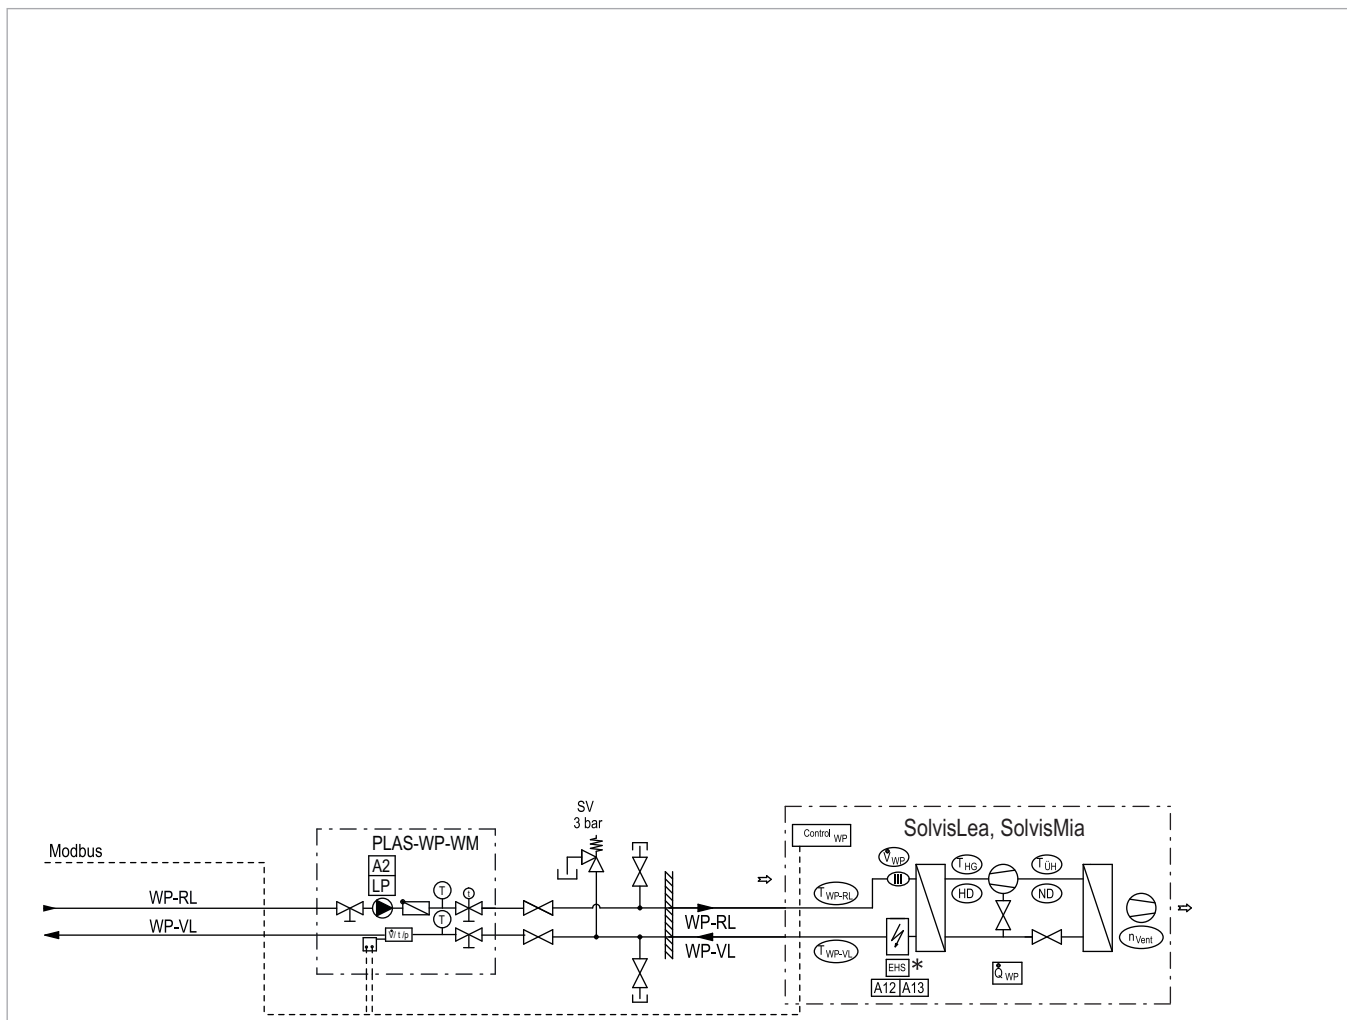


Fig. 13: SolvisBen Gas/Oil Hybrid with integrated heating circuit station, solar system and Solvis heating pump – part 2

* Electric heating element only for SolvisLea 7, 11, 14 and 8.3 Premium

The diagram shown represents an overview of the system based on the information available to us. It does not replace detailed and specific planning. Please note: to ensure the system functions correctly, the installation, operating and maintenance instructions must be followed. When connecting a third-party boiler, do not rely solely on the information provided by Solvis – always consult the manufacturer of the boiler.



The shut-off and safety valves shown provide a rough guide only. Observe all the relevant standards, guidelines and technical rules at all times. This is the only way to ensure that installations are carried out correctly.

We reserve all copyright and protection rights for this drawing. This drawing may only be duplicated or made accessible to third parties with our express written permission. SOLVIS GmbH

7.1.2 SolvisBen Gas/Oil Hybrid with heating pump and three heating circuits

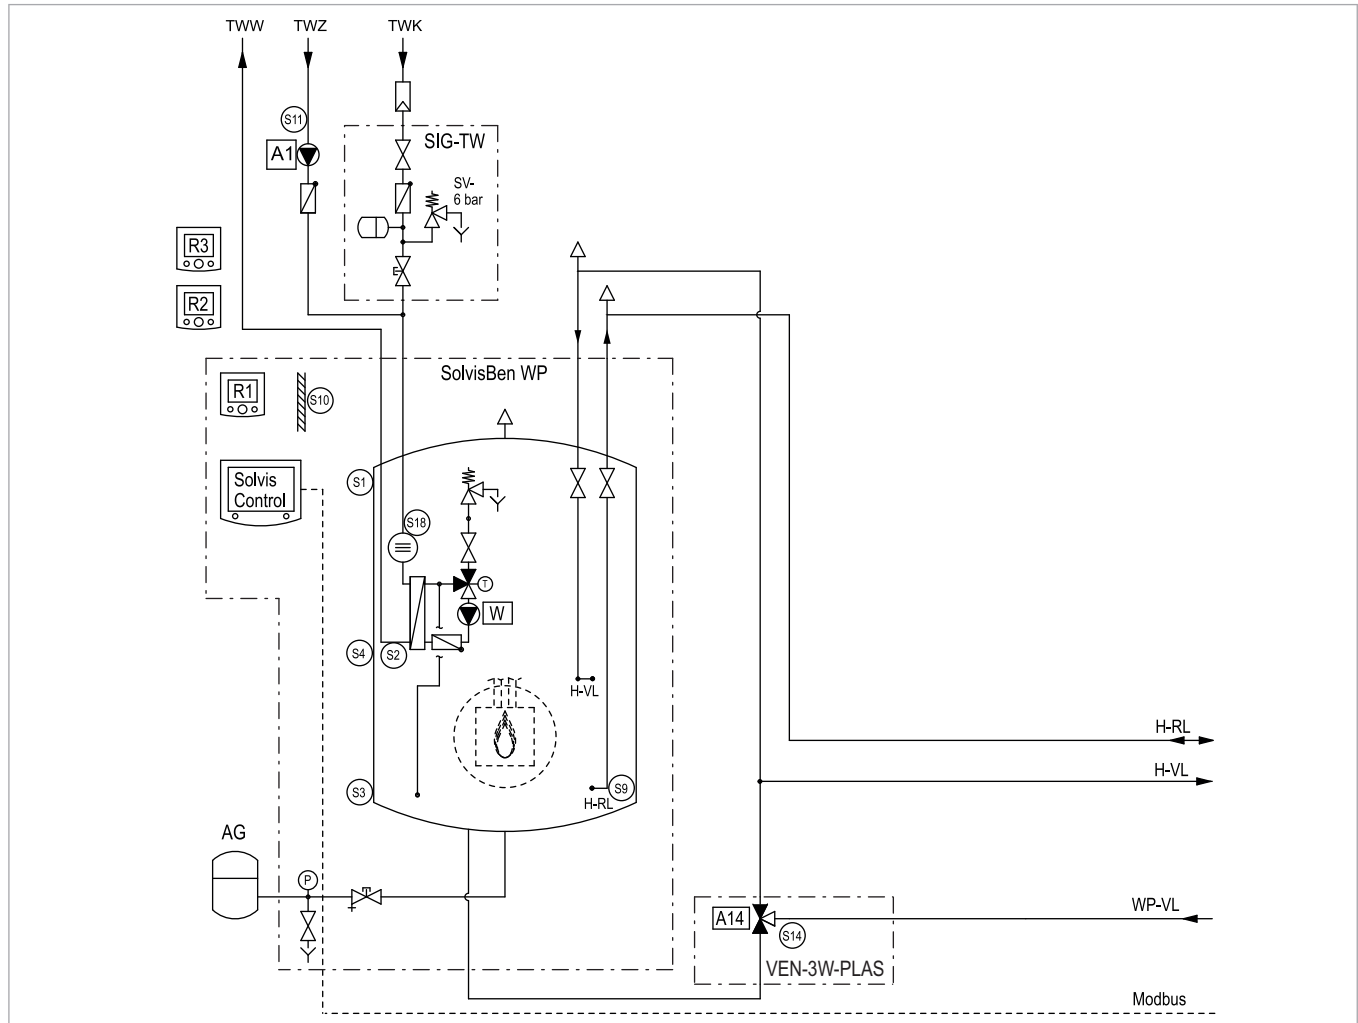


Fig. 14: SolvisBen Gas/Oil Hybrid with three mixed heating circuits and Solvis heating pump – part 1

Equipment

- Stratified solar storage tank
- SolvisControl 3 system controller
- Drinking water heating
- Three mixed heating circuits

Assemblies:

R1	Room operating unit, heating circuit 1
SIG-TW	Safety group, drinking water connection
PLAS-WP-WM	Wall-mounted WP buffer charging station
VEN-3W-PLAS	3-way switching valve for PLAS
BD	Lightning protection box

Abbreviations

LA	Air separator
AG	Expansion vessel
SAS	Sludge separator
SV	Safety valve
TWK	Drinking water network, cold connection
TWW	Drinking water network, hot connection
TWZ	Drinking water network, circulation connection
H-RL	Heating return
H-VL	Heating flow
LP	Load pump
V	Adjusting valve
HK1-3	Heating circuit 1-3

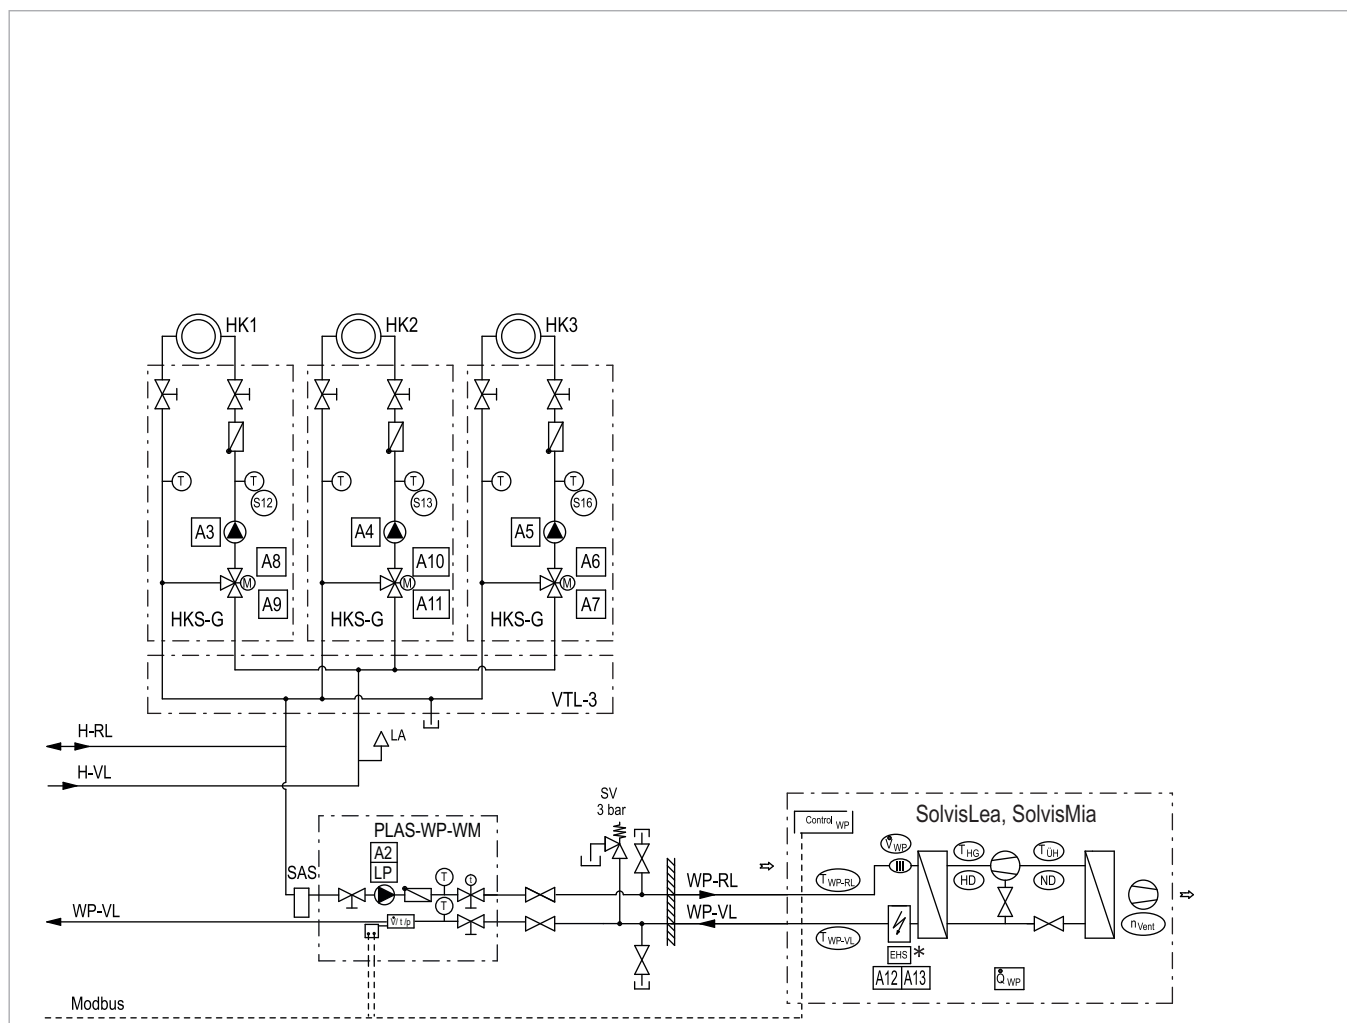


Fig. 15: SolvisBen Gas/Oil Hybrid with three mixed heating circuits and Solvis heating pump – part 2

* Electric heating element only for SolvisLea 7, 11, 14 and 8.3 Premium

The diagram shown represents an overview of the system based on the information available to us. It does not replace detailed and specific planning. Please note: to ensure the system functions correctly, the installation, operating and maintenance instructions must be followed. When connecting a third-party boiler, do not rely solely on the information provided by Solvis – always consult the manufacturer of the boiler.



The shut-off and safety valves shown provide a rough guide only. Observe all the relevant standards, guidelines and technical rules at all times. This is the only way to ensure that installations are carried out correctly.

We reserve all copyright and protection rights for this drawing. This drawing may only be duplicated or made accessible to third parties with our express written permission. SOLVIS GmbH

7.2 Mains circuit board SolvisBen WP

7.2.1 Connection table (system status)

SolvisBen WP / SolvisBen Lino / SolvisBen Solo

Sensors (temperature sensors and volume flow encoders)			Actuators (pumps, signals and control valves)		
Inputs		Designation (sensor)	Outputs		Designation
No.	Option*		No.	Option*	
S1	All	Sto. tank, top	A1	All	Circulation pump
S2	All	Hot water	A2	Lino / Solo	(Unused)
S3	All	Sto. tank reference		WP	PLAS WP load pump
S4	All	Heating buffer, top (HPo)	A3	All	Pump for heating circuit 1
S5	All	Solar flow 2	A4	All	Pump for heating circuit 2
S6	All	Solar return 2	A5	All	Pump for heating circuit 3
S7	All	Solar flow 1	A6	East-west roof	Valve 1
S8	All	Collector		SFB	(Unused)
S9	All	Heating buffer, bottom (HPu)		HC 3	Heating circuit 3 mixer open
S10	All	Outdoor temperature	A7	East-west roof	Valve 2
S11	All	Circulation		SFB	Load pump
S12	All	Flow for heating circuit 1		HC 3	Heating circuit 3 mixer closed
S13	All	Flow for heating circuit 2	A8	All	Heating circuit 1 mixer (open)
S14	All	Flow of heating pump / SolvisLino 4 / third-party boiler	A9	All	Heating circuit 1 mixer (closed)
S15	All	Cold water (optional)	A10	All	Heating circuit 2 mixer (open)
S16	East-west roof	Collector 2	A11	All	Heating circuit 2 mixer (closed)
	SFB	Solid fuel boiler	A12	Lino / Solo	Burner (L = 230 V~)
	Other	Flow for heating circuit 3		WP	SolvisLea control voltage (L/N/PE), heating element, stage 1 and 3 (A12->DHC1)
S17	All	Solar volume flow encoder	A13	Lino / Solo	PLAS Lino load pump / third-party boiler
S18	All	Water volume flow encoder		WP	Heating element, stage 2 and 3 (->DHC2)
I-1	Lino / Solo	External burner requirement	A14	Lino / Solo	Burner (floating)
	WP	SmartGrid connection board		WP	3-way switching valve
I-2	All	(Unused)	O-1	Lino / Solo	Modulation (0 to 10 V)
I-3	All	(Unused)		WP	(Unused)
R1	All	Room control element for heating circuit 1	SP1	All	PWM solar pump 1
R2	All	Room control element for heating circuit 2	SP2	All	PWM solar pump 2
R3	All	Room control element for heating circuit 3	W	All	PWM hot water pump
ST1	All	Jumper	LP	All	PWM load pump, PLAS WP/PLAS Lino
ST2	All	Jumper			

* "All" = applies to SolvisBen WP, SolvisBen Lino and SolvisBen Solo, "SFB" = additional solid fuel boiler or "HC 3" = additional mixed circuit

7.2.2 Connection Diagram

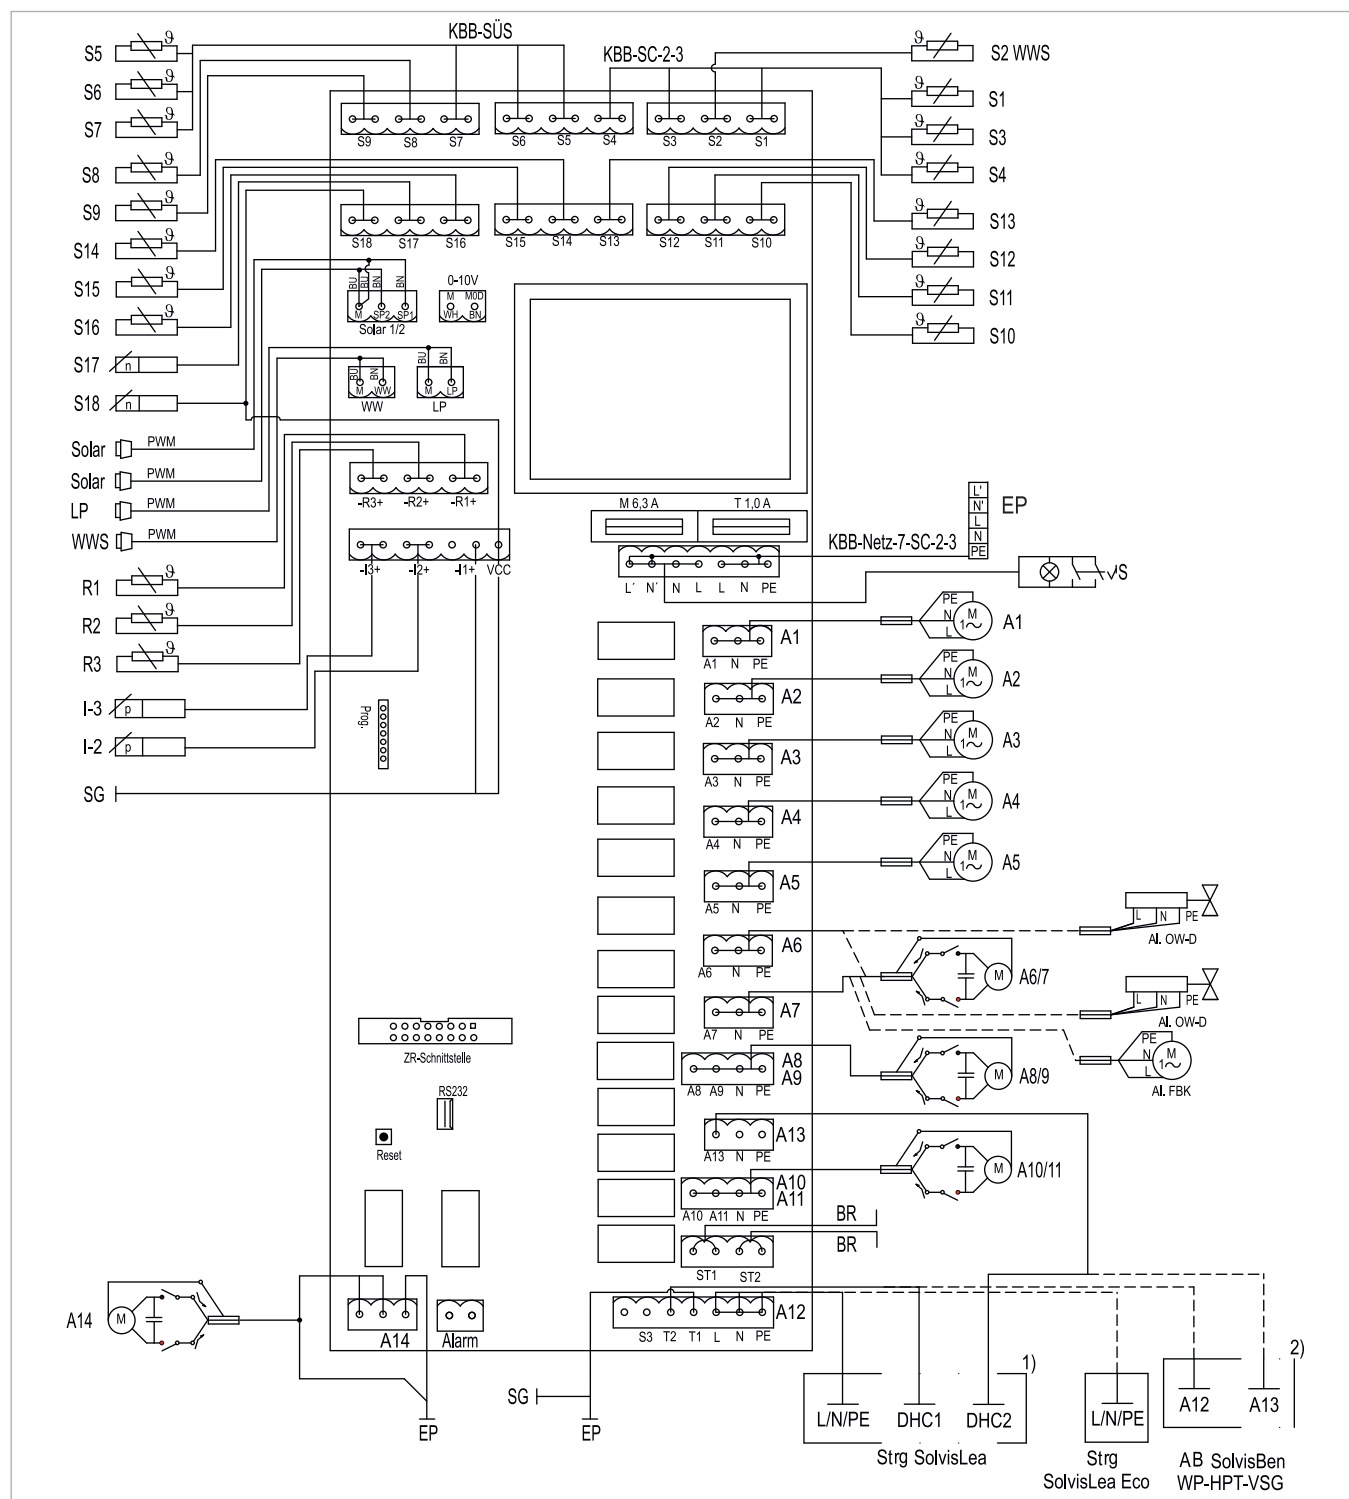


Fig. 16: SolvisControl 3 main circuit board for SolvisBen WP

1) SolvisLea: with SolvisBen WP (integrated EHS in heating pump, S14 sensor in SolvisBen), 2) SolvisLea Eco and SolvisMia: with SolvisBen WP-HPT-VSG (integrated EHS and volume flow/temperature sensor in the SolvisBen)

AL FBK	Solid fuel boiler alternative
AL OWD	East-west roof alternative
BR	Jumper
AB	SolvisBen connection box
EP	Expansion board, see → fig. 18, p. 24
KBB SC-2-3	SolvisControl 3 sensor cable harness
KBB-SÜS	Sensor cable harness for solar heat transfer station
LP	Load pump

PWM	Pulse width modulation
R1-R3	Room operating unit
SG	SmartGrid connection board, see → Fig. 19, p. 25
Solar	Solar pump
Strg	Solvis Lea/Lea Eco control
WWS	Hot water station
ZV	Central controller interface
UV	Switching valve

7.3 Mains circuit board SolvisBen Hybrid

7.3.1 Connection table (system status)

SolvisBen/SolvisMax Gas Gas/Oil and Gas/Oil Hybrid

Sensors (temperature sensors and volume flow encoders)			Actuators (pumps, signals and control valves)		
Inputs		Designation (sensor)	Outputs		Designation
No.	Option*		No.	Option*	
S1	All	Sto. tank, top	A1	All	Circulation pump
S2	All	Hot water	A2	Gas/Oil	(Unused)
S3	All	Sto. tank reference		Gas Hybrid/Oil Hybrid	PLAS-WP load pump
S4	All	Heating buffer, upper	A3	All	Pump for heating circuit 1
S5	All	Solar flow 2	A4	All	Pump for heating circuit 2
S6	All	Solar return 2	A5	All	Pump for heating circuit 3
S7	All	Solar flow 1	A6	East-west roof	Valve 1
S8	All	Collector		SFB	(Unused)
S9	Gas Hybrid/Oil Hybrid	Bottom heating buffer		HC 3	Heating circuit 3 mixer open
	Other	Condensate monitoring	A7	East-west roof	Valve 2
S10	All	Outdoor temperature		SFB	Load pump
S11	All	Circulation		HC 3	Heating circuit 3 mixer closed
S12	All	Flow for heating circuit 1	A8	All	Heating circuit 1 mixer (open)
S13	All	Flow for heating circuit 2	A9	All	Heating circuit 1 mixer (closed)
S14	Gas/Oil	(Unused)	A10	All	Heating circuit 2 mixer (open)
	Gas Hybrid/Oil Hybrid	Heating pump flow	A11	All	Heating circuit 2 mixer (closed)
S15	All	Cold water (optional)	A12	All	Burner (230 V ~)
	Gas Hybrid/Oil Hybrid	Additional condensate monitoring	A13	Oil/Oil Hybrid	Burner 2
S16	East-west roof	Collector 2		Gas/Gas Hybrid	(Unused)
	SFB	Solid fuel boiler	A14	Oil	Fault (SÖ-BW-2)
	Other	Flow for heating circuit 3		Gas	(Unused)
S17	All	Solar volume flow encoder		Gas Hybrid/Oil Hybrid	3-way switching valve
S18	All	Water volume flow encoder	O-1	All	(Unused)
I-1	Gas/Oil	External burner requirement	SP1	All	PWM solar pump 1
	Gas Hybrid/Oil Hybrid	SmartGrid connection board	SP2	All	PWM solar pump 2
I-2	All	(Unused)	W	All	PWM hot water pump
I-3	All	Solar pressure	LP	Gas/Oil	(Unused)
R1	All	Room control element for heating circuit 1 (optional)		Gas Hybrid/Oil Hybrid	PWM PLAS-WP load pump
R2	All	Room control element for heating circuit 2 (optional)	Alarm	All	Malfunction message (floating)
R3	All	Room control element for heating circuit 3 (optional)			
ST1	Oil/Oil Hybrid	mSTL			
	Gas/Gas Hybrid	Jumper			
ST2	All	Jumper			

* "All" = applies to SolvisMax/Ben Gas and SolvisMax/Ben Oil as well as for SolvisMax/Ben Gas Hybrid and SolvisMax/Ben Oil Hybrid, "SFB" = additional solid fuel boiler or "HC 3" = additional mixed heating circuit

7.3.2 Connection Diagram

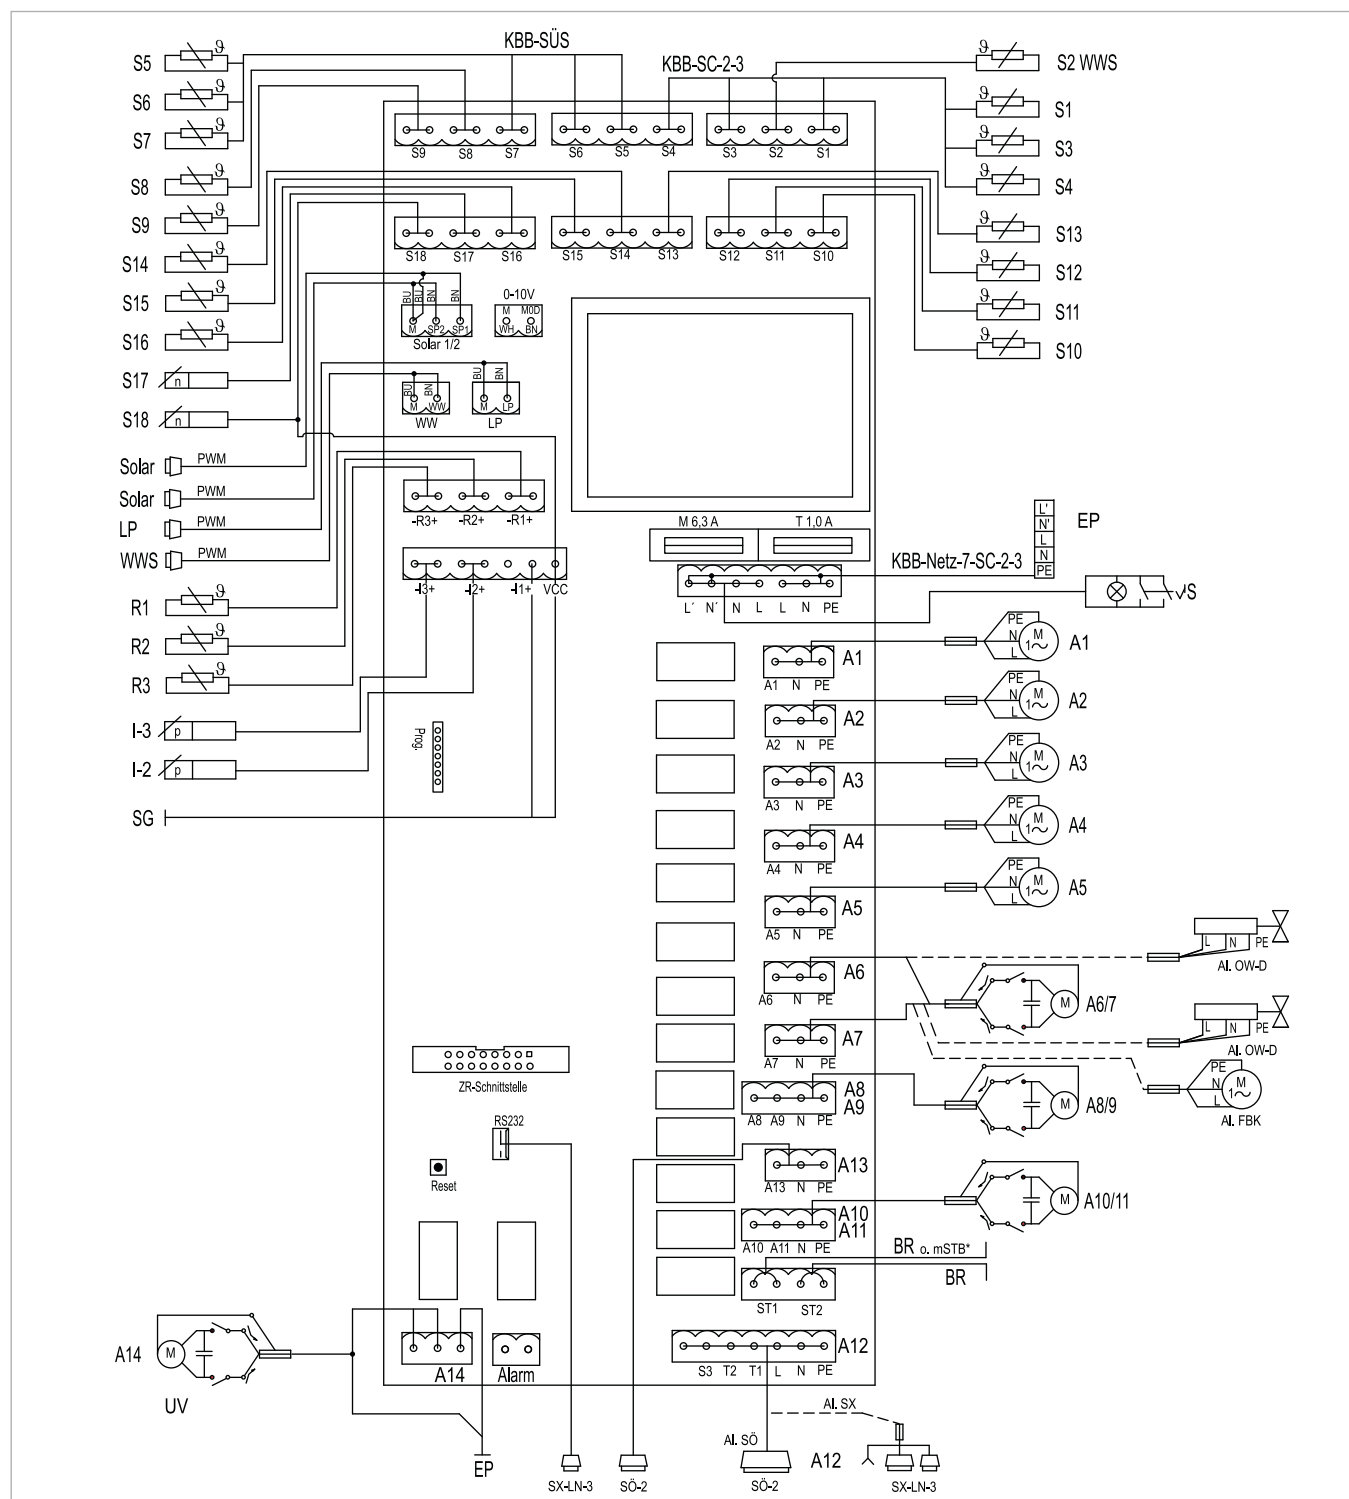


Fig. 17: SolvisControl 3 mains circuit board for SolvisBen Gas/Oil Hybrid

* mSTB for SolvisBen Hybrid Oil only

AL SFB	Solid fuel boiler alternative
AL OWD	East-west roof alternative
AL SÖ	Alternative connection for SolvisBen Oil
AL SX	Alternative connection for SolvisBen Gas
BR	Jumper
EP	Expansion board, see ➔ fig. 18, p. 24
KBB SC-2-3	SolvisControl 3 sensor cable harness

KBB-SÜS	Sensor cable harness for solar heat transfer station
mSTB	Mechanical safety temperature limiter
SG	SmartGrid connection board, see ➔ Fig. 19, p. 25
UV	Switching valve
WWS	Hot water station
ZR	Central controller interface

7.4 Expansion Board

7.4.1 View



Fig. 18: Expansion board for SolvisControl 3 mains circuit board

7.4.2 Connection table

SolvisBen Gas/Oil and SolvisBen Gas/Oil Hybrid

Actuators (pumps)		
Output no.	SolvisBen Gas/Oil Hybrid	SolvisBen Gas/Oil
AC1	SmartGrid connection board and A12 voltage supply	(Reserve)
AC2	A14 voltage supply	(Reserve)
AC3	SolvisLea/SolvisLea Eco control voltage	(Reserve)
AC4	Solar pump 1 and 2	Solar pump 1 and 2
AC5	Hot water pump	Hot water pump

SolvisBen Solo

Actuators (pumps)		
Output no.	SolvisBen HP	SolvisBen Lino/Solo
AC1	SmartGrid connection board and A12 voltage supply	(Reserve)
AC2	A14 voltage supply	Load pump
AC3	(Reserve)	(Reserve)
AC4	Solar pump 1 and 2	Solar pump 1 and 2
AC5	Hot water pump	Hot water pump

7.5 SmartGrid connection board

The SmartGrid connection board is an interface with several functions. It can relieve the mains by switching off the heating pump. It is also possible to take advantage of favourable tariffs during periods with low loads to charge the hot water area to a particularly high temperature.

Furthermore, instead of low-cost electricity, your own electricity from a PV system can also still be used (additional hardware and potential inverter programming necessary).

7.5.1 Connection table

Operating status	Switch state		Explanation
	SG1	SG2	
1 – “utility supply company idle period”	1	0	Heating pump disabled by utility supply company
2 – Normal mode	0	0	If nothing is connected to the connection board, this state is continuously active.
3 – Increased operation	0	1	Increase of the setpoint
4 – ext. requirement	1	1	Heating pump switches on if possible; operation as 3

7.5.2 Connection Diagram

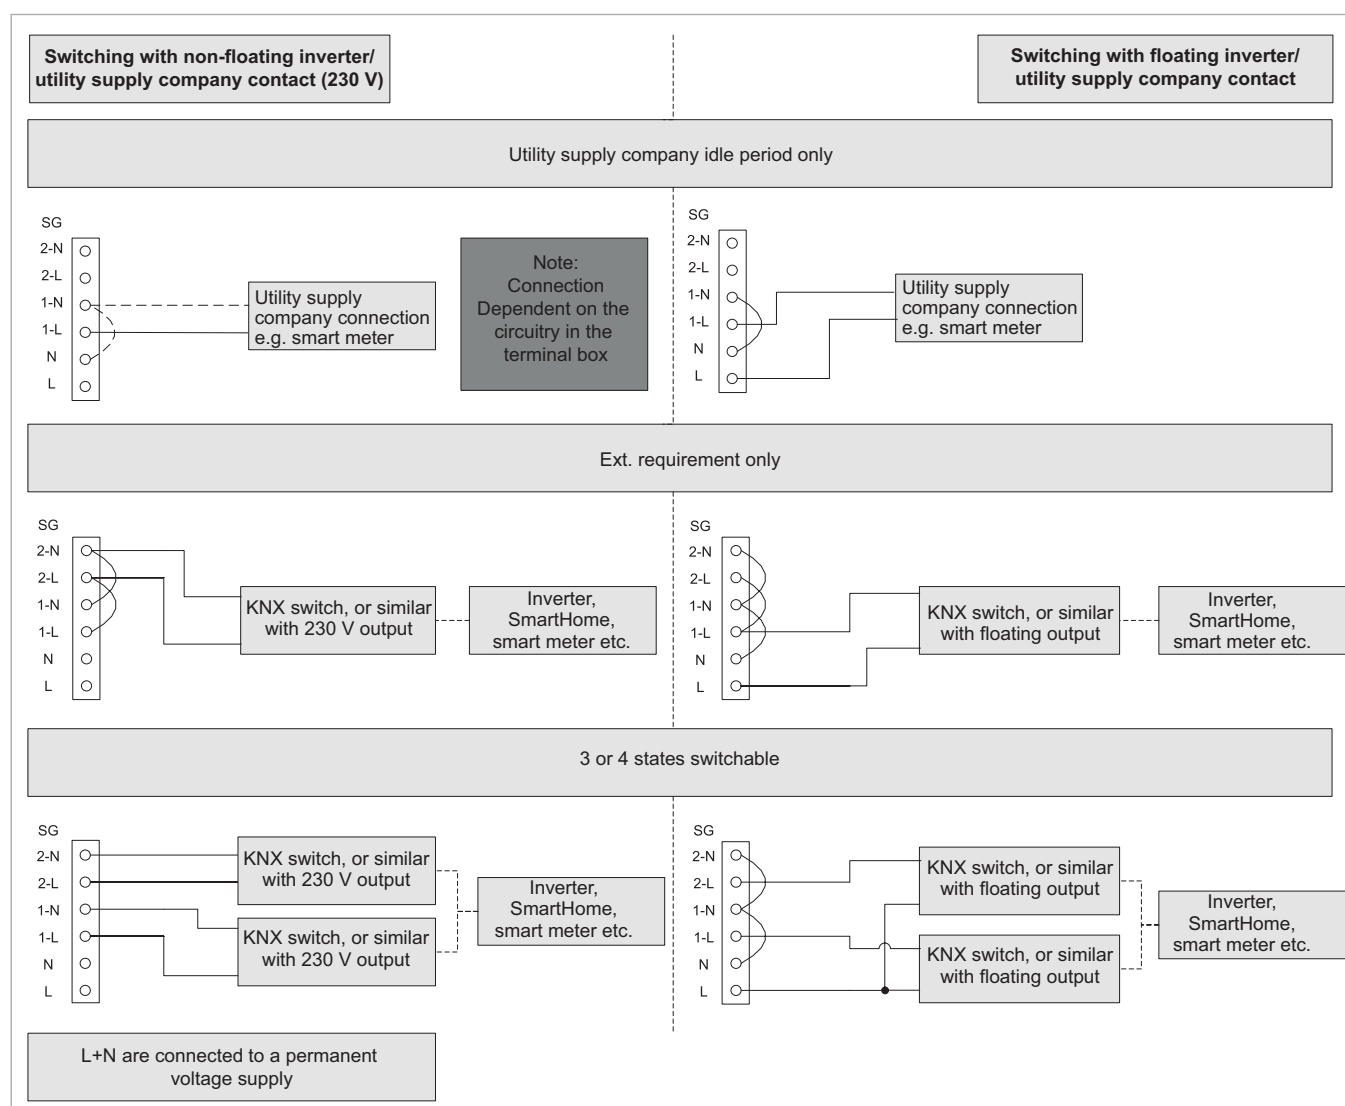


Fig. 19: SmartGrid connection options for the SolvisControl 3 mains circuit board







7.6 Explanation of Symbols

7.6.1 Hydraulic elements




Sensors

Symbol	Meaning
	Pressure
	Temperature

Components

Symbol	Meaning
	Membrane expansion vessel
	Oil or gas burner
	Solar collector
	Consumers in the heating circuit
	Heat exchanger
	Heat quantity counter
	Solid fuel boiler (FBK) or pellet boiler (Lino 3)
	Primary tank VG-xx

Valves



Symbol	Meaning
	Shut-off valve or valve
	Adjusting valve
	Bleeding tap
	Motor-driven mixing valve
	Gravity brake / non-return valve
	Safety valve
	Thermostatic mixing valve
	Solar cap valve
	Boiler filling and draining valve
	Thermal discharge safety device (TAS)

Other hydraulic components


Symbol	Meaning
	Volume flow encoder
	Pump
	Sludge separator
	Drinking water filter

7.6.2 Electrical symbols


Actuators

Symbol	Meaning
	General actuator (pump / control valve / mixing valve / connection)
	Servomotor (e.g. on the three-way mixing valve)
	Motor (e.g. of a pump)

Sensors

Symbol	Meaning
	General sensor (temperature sensor, volume flow encoder, etc.)
	Volume flow encoder
	Temperature sensor

Other electrical components

Symbol	Meaning
	Jumper
	On/off switch (button with lock function)
	Automatic firing system
	Lightning protection box
	Room control element
	Terminal S3 at output A12



SOLVIS GmbH
Grotrian-Steinweg-Straße 12
D-38112 Braunschweig
Phone: +49 (0) 531 28904-0
Fax.: +49 (0) 531 28904-100
E-mail: info@solvis.de
Internet: www.solvis.com

